

A	13.6 Ω
B	110 Ω
C	21,050 Ω
D	117,700 Ω
E	4,950 Ω
F	7,500 Ω
G	40 M Ω
H	800 M Ω
J	750 M Ω
K	40 M Ω
L	3,000 Ω
M	150 M Ω
N	200 M Ω
P	4 MEG Ω
Q	15 MEG Ω
R	11.5 Ω
S	1 Ω
T	45 Ω
U	4 Ω
V	80 MEG Ω
W	4 MEG Ω
X	RECTIFIER
X1	RECT SERIES
X2	RECT SHUNT
Y	1 MFD COND.
Z	10 M Ω POT

WD-260

SIMPSON ELECTRIC CO.


SCHEMATIC WIRING DIAGRAM

DRAWN TRACED

WB 4-16-40 EJR 4-23-40

CHECKED APPROVED

ISSUE:

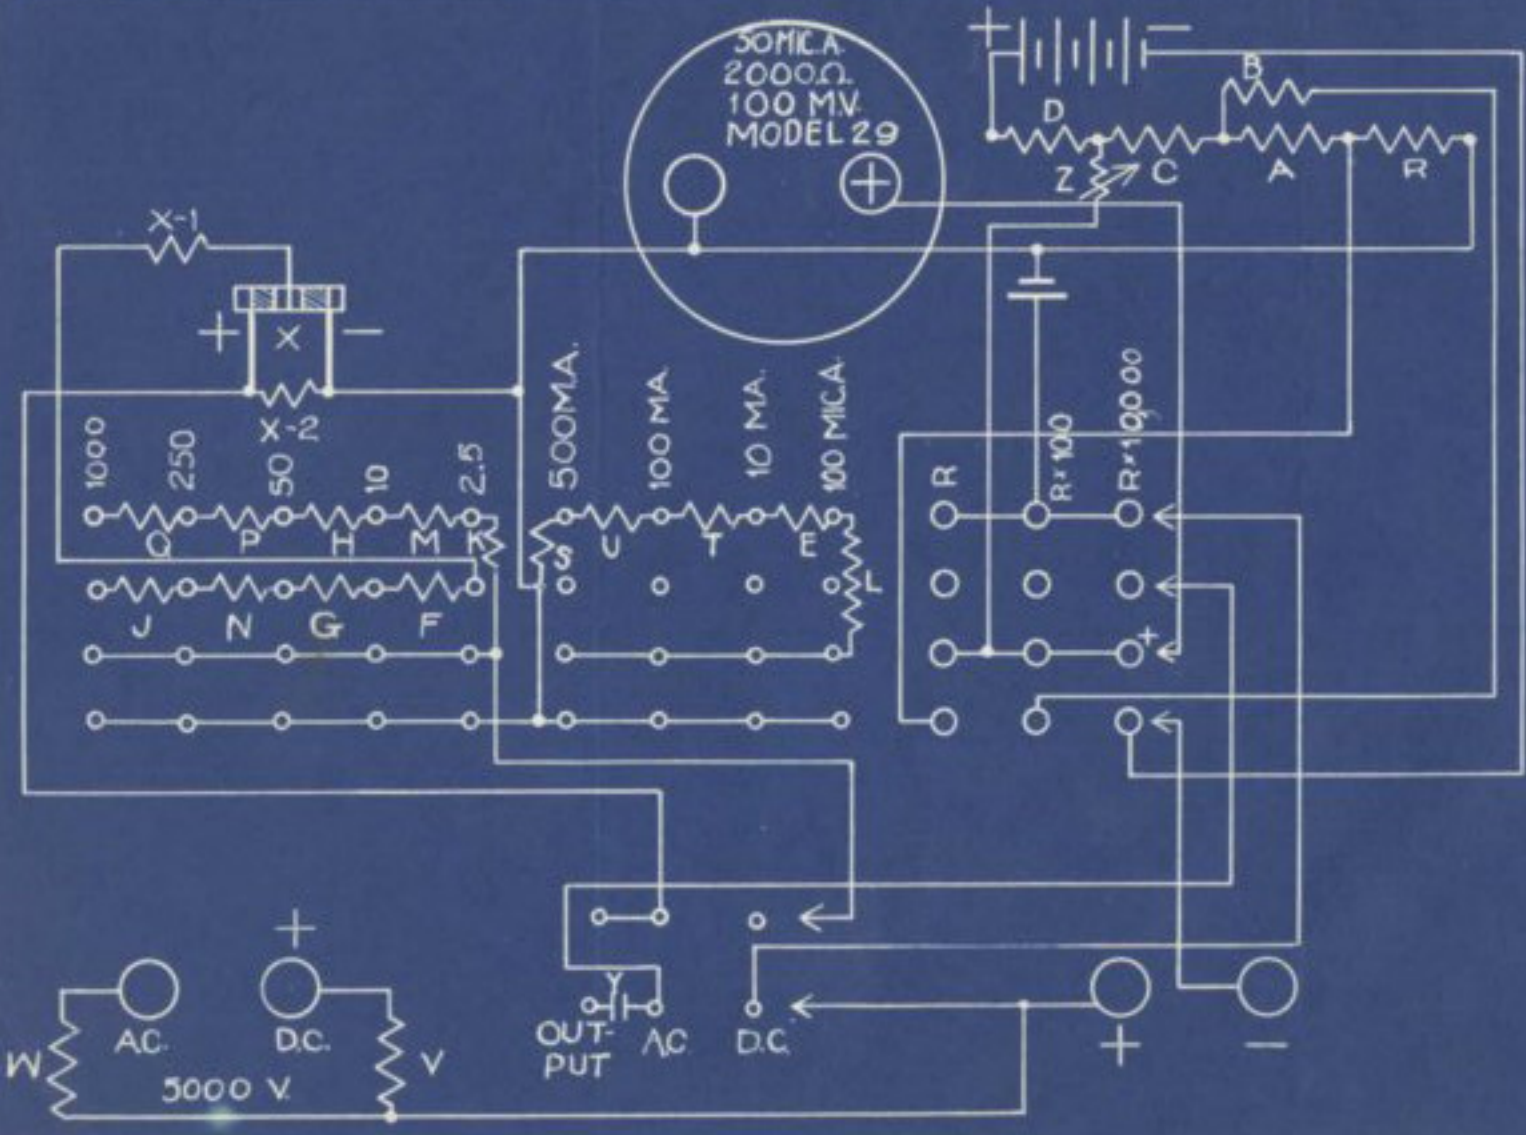

USED ON _____ D'WG. _____
 MATERIAL _____
 SIZE _____
 KIND _____
 SHAPE _____
 TEMPER _____
 FINISH _____

WD-260